
REPLACEMENT PARTS

These are replacement parts for purchase. Pictures do not represent contents of set.









Parts List & Pricing:

00754 - 1	Strap Set - 2 Straps	\$20.00
00754 - 2	PTO Clips (2 pcs)	\$12.50
00754 - 3	Wall Bracket (1 pc)	\$15.00
00754 - 4	Bumper Set (4 pcs)	\$20.00

Send Check or Money Order with Phone Number to: **Tech Team**[®] P.O. Box 983 Middleburgh, NY 12122 NYS Resident add appropriate% Sales Tax ** \$10.00 Shipping & Handling to Lower 48 States**
** \$25.00 Shipping & Handling to Alaska, Hawaii, Puerto Rico**

WARRANTY AND DISCLAIMERS


Tech Team Products, Inc. guarantees that its products are free from defects in material and workmanship for a period of 90 days from the original date of purchase. For electronic items (anything that requires a battery), the warranty period is also 90 days. This Warranty applies to non-commercial use only. Commercial use voids this warranty. In the event of any defects in material or workmanship. Tech Team Products, Inc.'s sole liability therefore shall be the replacement of any such product(s) and/or components that are defective in material or workmanship. The replacement of any such product(s) and/or components shall be Tech Team Products, Inc.'s sole responsibility. This warranty specifically excludes any and all consequential or accidental damages. No other warranties or liabilities whatsoever are either expressed or implied. If any such warranties shall be imposed by law, not withstanding this provision, then such warranties shall be the responsibility of Tech Team Products, Inc.'s reseller if applicable. There shall be no warranties of merchantability, use of trade, or fitness for a particular purpose. Alteration of any product, misuse, or exceeding any stated product limitations voids this warranty. It should be obvious when using some of these products that approved protective safety gear, including, but not limited to, eye and ear protection, should be utilized. Using the appropriate safety gear is the sole responsibility of the person(s) using the product. It should also be obvious that certain products must not be consumed, inhaled, or taken internally. The user takes full responsibility for inappropriate or incorrect use of these items. Accessories used in many of our product pictures are props to illustrate how the products are used. As such, they are not included with any product. All photographs, drawings, copy, instructions, etc. are the exclusive property of Tech Team Products, Inc. All downloadable files are intended for the use of the end user of Tech Team Products. Inc.'s products and cannot be reproduced without the express written permission of Tech Team Products. Inc.'s 2019

Always wear appropriate vision and hearing protection when using this product!

TECH TEAM

00754

SWING AWAY KAYAK & PADDLEBOARD STORAGE RACK

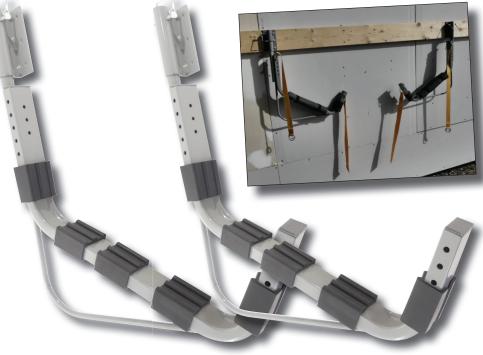

The Tech Team[®] Swing Away Paddle and Kayak Storage Rack is designed to be a sturdy and convenient wall mounted rack for storing kayaks, SUP's, surfboards, and paddles.

In the course of shipping and packing, parts may end up missing or damaged-Call us at 631.673.5975. 8:30 a.m. - 5:00 p.m. Eastern Time. We will promptly send replacements.

Always wear appropriate vision and hearing protection when using this product!

The Tech Team Swing Away Paddle and Kayak Storage Rack is designed to support kayaks weighing up to 200 lbs. along with their paddles and/or fishing rods. The rack is constructed from heavy gauge steel tube and fittings that are precision welded and finished with a durable powder coat finish. The weight bearing capacity of this rack system is in direct proportion to how it is mounted. Standard 2"x 4" and 2"x 6" studs like those commonly found in the walls of buildings and houses, are only 1.5" wide. Even if you managed to get the mounting screws into the dead center of them, there is no guarantee that one day you will not find your kayak on the floor. The way to prevent this and ensure a rock solid and stable mount is to use a 2"x 6" lateral that is mounted to at least 3 or 4 of the stude with appropriate screws. This accomplishes two things. First, it adds the necessary strength and stability. Second, it gives you the opportunity to place the mounting hooks at any width that is appropriate for your boat, as opposed to being limited to 16" which is the standard on center spacing for wall studs. The system has also been designed to allow the hooks to pivot 90° so that when they are not in use, they will be flush with the wall and out of the way.

All pictures are representative.



Typical wall studs are 16'' on center. Mount a 2''x 6'' across the studs and securely screw is to at least 3, preferably 4 of them, making sure that the 2''x 6'' is level. On drywall use a stud finder.



Measure the length of your boat and use this to determine the spacing of the hooks.



At the desired location put one of the hinges against the 2''x 6'', mark the locations of the holes, and then drill $\frac{1}{8}''$ diameter pilot holes.



Use the PTO clips to attach the straps as shown. The strap with the double D ring will be most useful if it is attached to the top of the hook.



Hook folded flat against the wall. Align the correct holes in the hinge and the hook shank. Secure with the PTO clip.



Use 6 screws to secure each hinge section to the 2''x 6" and then install the hook. Use a level to set the hinge vertical.



Hook in the forward position for hanging a kayak or SUP. Align the correct holes in the hinge and the hook shank. Secure with the PTO clip.



This is how to secure the straps using the double D rings.